

Model Name:

Basic PDU

Features:

Power Management:



Overload Protection

When overload, circuit breaker will automatically trip to protect the safety of electricity.

Power Management Upgrade: (Works with CPM, the following are CPM functions)



Remote Monitor

Remote monitoring PDU status by web and SNMP



Threshold Sensing

User-definable warning and overload threshold value as the basis for alarm.



Environment Detection

Optional accessory probe to detect temperature and humidity. (available by model)



Mail Notification

Notify specified user by mail and SNMP when outlet action or current over threshold.




Central Management

Free centralized monitoring software, real-time monitoring of a large number of PDU, provide data records and history chart.

Model Number:

B1H-1623K-08N1

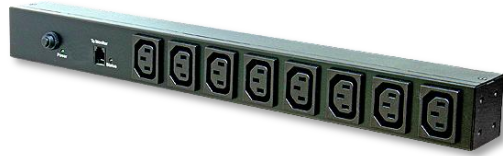

Plug



Specification

Output		Input	
Voltage	200-240 VAC	Voltage	200-240 VAC
Max. Current	16 A	Frequency	50/60Hz, full range
Outlet	(8) C13	Max. Capacity	3840 VA
Overload Protection	(1) 16A UL1077 breaker	Connection	C20, power cord, 3m
		Power Ind.	(1) Green LED
Measurement		Other	
None		CPM Link	(1) RJ11
		CPM Link Ind.	(1) Yellow LED
Dimension/Weight		Operation	
Net size	432 x 44 x 44 mm	Operation Temp.	0 ~ 45°C
Net weight	1.3 kg	Operation Humid.	0% ~ 90% RH
Package Size	505 x 210 x 90 mm	Storage Temp.	-20°C ~ 65°C
Package Weight	3.0 kg, 2 pc per box	Storage Humid.	0% ~ 90% RH
Approval			
Certification	CE		
Warranty	2 years		

Package

No.	Description.
1	PDU 1 set
2	Rack mount accessories 1 set
3	Manual by link below



Optional Accessory

Model Number	Model Name
STR-C14-B	C13 socket protection
CPM-MON-08100-EX	CPM –Cabinet Power Monitor



Line Drawing

