### **Model Name:**

#### **POK PDU**

POK PDU provides remote manual control of the critical devices by clicking on a few buttons on the smart phone or computer webpage. Stop the problem device by cutting off the power to a specific outlet. By cycling the power off and restarting the device remotely, you save time and money by eliminating the need to send technicians to the root cause of the problem.

Managers can monitor the power usage information of each output port from the remote end through the Internet to fully understand the power consumption of all the devices. Set up overload event alerts and notify managers via Email and TRAP, allowing managers to respond to crises in the shortest possible time to minimize disasters.

POM has one environmental sensor ports that track climate information: temperature and humidity environment variables. The data is available from any web browser and is SNMP-compliant for easy tracking of critical data without the use of any external software.

Provide central management software, which can manage a large number of PDUs' power, temperature and humidity information. The database stores the power consumption information of the power strip and provides the history curve chart for the manager's reference.

#### Features:

#### **System Function:**

- Built-in embedded system: Support 10M Ethernet interface, provides webpage and SNMP remote management.
- Local display information: Seven-segments can display current, web site and temperature and humidity values.
- Multiple protocols: Support ICMP, ARP, IP, TCP, UDP, DHCP, HTTP, NTP, SNMP v1, IPv4

#### **Power Management:**



#### REMOTE MONITOR

#### **Remote Monitor**

Remote monitoring PDU status by web and SNMP



REMOTE CONTROL

#### **Remote Control**

Remote per outlet on/off by web and SNMP.



Digital I/O

#### Digital I/O

Connect various sensors. Support web pages to set various actions.



## NOTIFICATION

#### **Mail Notification**

Notify specified user by mail and SNMP when outlet action or current over threshold.



### **Threshold Sensing**

User-definable warning and overload threshold value as the basis for alarm.



#### **Event Alert**

When current exceeds the preset threshold, PDU will beep and LED will flash.



SEQUENC

#### **Power Sequence**

User-definable power on/off sequence time.



#### **Schedule Control**

Timed & scheduled on/off/reboot control.



#### **Ping Event Control**

When the specified IT device does not respond to PING, the output will perform a preset power action.



PROTECTION

#### **Overload Protection**

When overload, circuit breaker will automatically trip to protect the safety of electricity.



GROUP CONTROL


#### **Group Control**

Set multiple outlets as a single group while controlling the power output.



**Outlet-Level Monitor** 

Remote per outlet current monitoring.





#### **Environment Detection**

Optional accessory probe to detect temperature and humidity.



#### **Central Management**

Free centralized monitoring software, real-time monitoring of a large number of PDU, provide data records and history chart.

## **Model Number:**

## WKE-162DK-08V8

# **Specification**

-			
Output		Input	
Voltage Max. Current Outlet  Measurement Current Voltage Active Power Apparent Power Frequency Power Factor kWh	200-240 VAC 16 A (8) Universal Socket +/-5%+/-0.1A @0.2A ~ 20 A +/- 5% +/- 1V @80V~260V +/- 5% +/- 5W @50W~8000W +/- 5% @50VA~8000VA +/- 5% @50~65Hz +/- 5% @0.1~1.0 . 1kWh~99999 kWh, (+/- 5% @50W~8000W) kh=1.0	Voltage Frequency Max. Capacity Connection Overload Protection Other ENV Connection DI	200-240 VAC 50/60Hz, full range 3680 VA Inlet IEC320 C20 Circuit breaker (UL1077)  (2) RJ11 Power Supply: 0 to 12 Vdc 0.8A Termination Connection: 0.5 to 1.5 mm2/28 to 16AWG Output Range: Contact open(off) or closed (on) Rated load:16A 240VAC / 16A 24Vdc Max. switching current: 16A Max. switching voltage: 250VAC Max. switching capacity: 4000VA Termination Connection: 0.5
Dimension/Weig	tht	Operation	to 2.5 mm2/24 to 12 AWG
Net Size	432 x 216 x 44.5 mm	Operation Temp.	0 ~ 45°C
Net Weight	3.5 kg	Operation Humid.	0% ~ 90% RH
Package Size	490 x 330 x 155 mm	Storage Temp.	-20°C ~ 65°C
Package Weight	4.1 kg	Storage Humid.	-20 C 65 C 0% ~ 90% RH
Approval	7.1 Ng	Storage Hulliu.	0/0 90/0 NH
	2,000,00		
Warranty	2 years		


# **Package**

## **Accessory**

No	Description	<b>Model Number</b>	Model Name
1	PDU 1 set	CPM-ENV-2	Temp./Humidity probe
2	Rack mount accessories 1 set		(ENV)
3	Software CD (manual, MIB)		
4	Power cord, C19 to C20, 3 m		

## **Line Drawing**



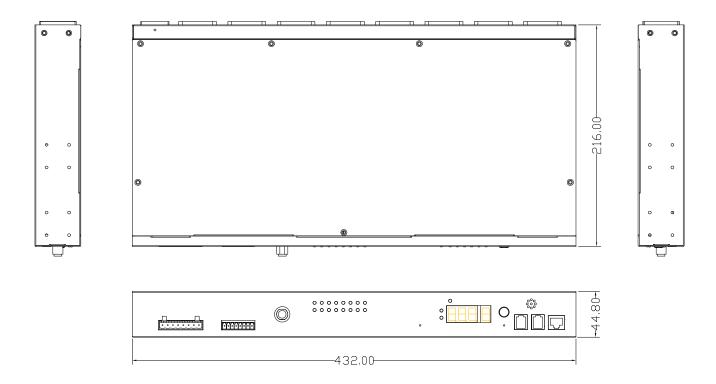



## Annex. 1

## **Ping Function**

# The device responds PING normally

# The device is not responding PING properly

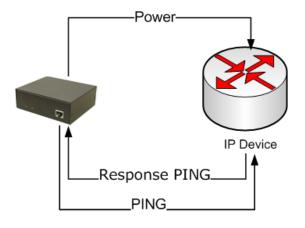

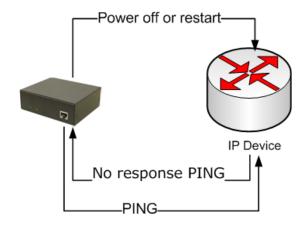

## Annex. 2

# **Temp./Humidity Probe**



## Specification

Hardware			
Connection	RJ11, cord 1.8m		
Temperature		Humidity	
Range	-30°C~70°C	Range	0~100%
Resolution	0.1°C	Resolution	0.1%
Precision	±1°C	Precision@ 5°C~60°C, 20%~80%	± 3%
		Precision@ other condition	±5%
		Sampling rate	1 second
Operation		Sampling rate  Dimension/Weight	1 second
Operation Operation Temp.	0°C~50.0°C		1 second 127 x 22 x 20 mm
	0°C~50.0°C -20.0°C~60.0°C	Dimension/Weight	127 x 22 x 20
Operation Temp.		Dimension/Weight Size	127 x 22 x 20 mm